


Surface Inlet

Surface inlets are manufactured from heavy duty cast aluminum. They offer the benefit of a flush finish fit and smaller holes to prevent debris from entering the drain line. They will withstand light vehicular traffic and are manufactured in 4" through 24" diameters.

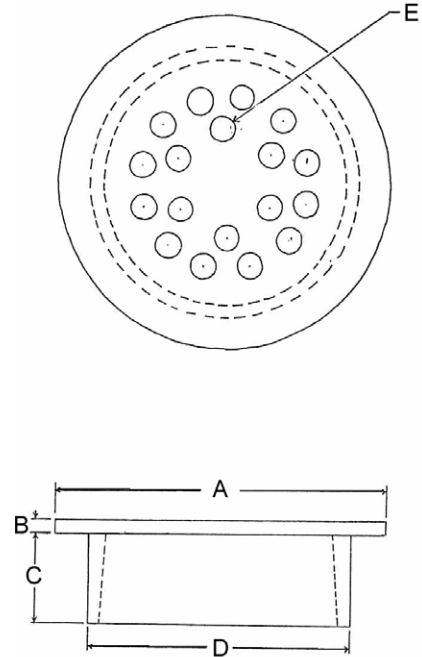

Size	A	B	C	D	E	No. of Holes
4"	4 15/16"	1/4"	1 9/16"	3 13/16"	7/32" R	7
6"	7 3/8"	3/8"	2"	5 7/8"	9/32" R	18
8"	9 3/8"	1 1/32"	2"	7 1/2"	9/32" R	30
10"	12 3/8"	1/2"	2 5/32"	9 3/4"	9/32" R	30
12"	14 11/16"	9/16"	2 7/16"	11 9/16"	9/32" R	54
15"	17 5/8"	9/16"	2 7/16"	14 3/8"	9/32" R	78
18"	20 3/4"	1/2"	2 3/4"	17 3/4"	9/32" R	102
24"	27"	1/2"	2 3/4"	23 1/2"	9/32" R	179

	4"	6"	8"	10"	12"	15"	18"	24"
Weight	1 lb.	2 lb.	3.24 lb.	5 lb.	6.5 lb.	13 lb.	25 lb.	40 lb.
Water Cap. (CFS)*	.07	.22	.37	.37	.66	.95	1.24	2.18

*CFS based on orifice coefficient of .67 with 4 inches of water over the inlet.